


## EMN 25

Twisting sleeve, plastic, RAL 7035, M25



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

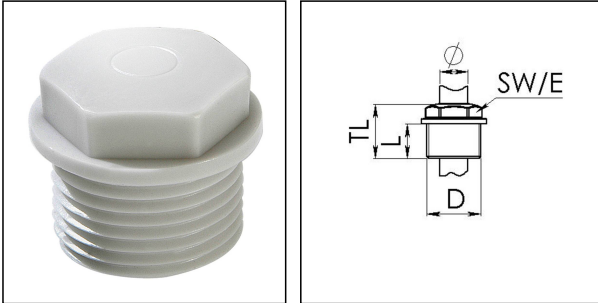

<b>Material</b>	Polyethylene
<b>Temp. range min</b>	-20 °C
<b>Temp. range max</b>	80 °C
<b>Thread type</b>	M
<b>Ø Connection thread D</b>	25
<b>Lead</b>	1,5
<b>Length screw-in thread L</b>	12 mm
<b>Protection class</b>	IP54
<b>Ø cable diameter min</b>	9 mm
<b>Ø cable diameter max</b>	16 mm
<b>Key width SW</b>	24 mm
<b>Collar diameter (E)</b>	29 mm
<b>Total length TL</b>	22 mm
<b>Product Color</b>	RAL 7035
<b>Order no. RAL 7035</b>	50061003
<b>Type</b>	EMN 25
<b>Packing unit</b>	25
<b>ETIM-Classification</b>	EC000451

### Recommended accessories

<b>EMUG 25</b>	10060773
<b>EADR 25</b>	10062804

15.10.2020


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

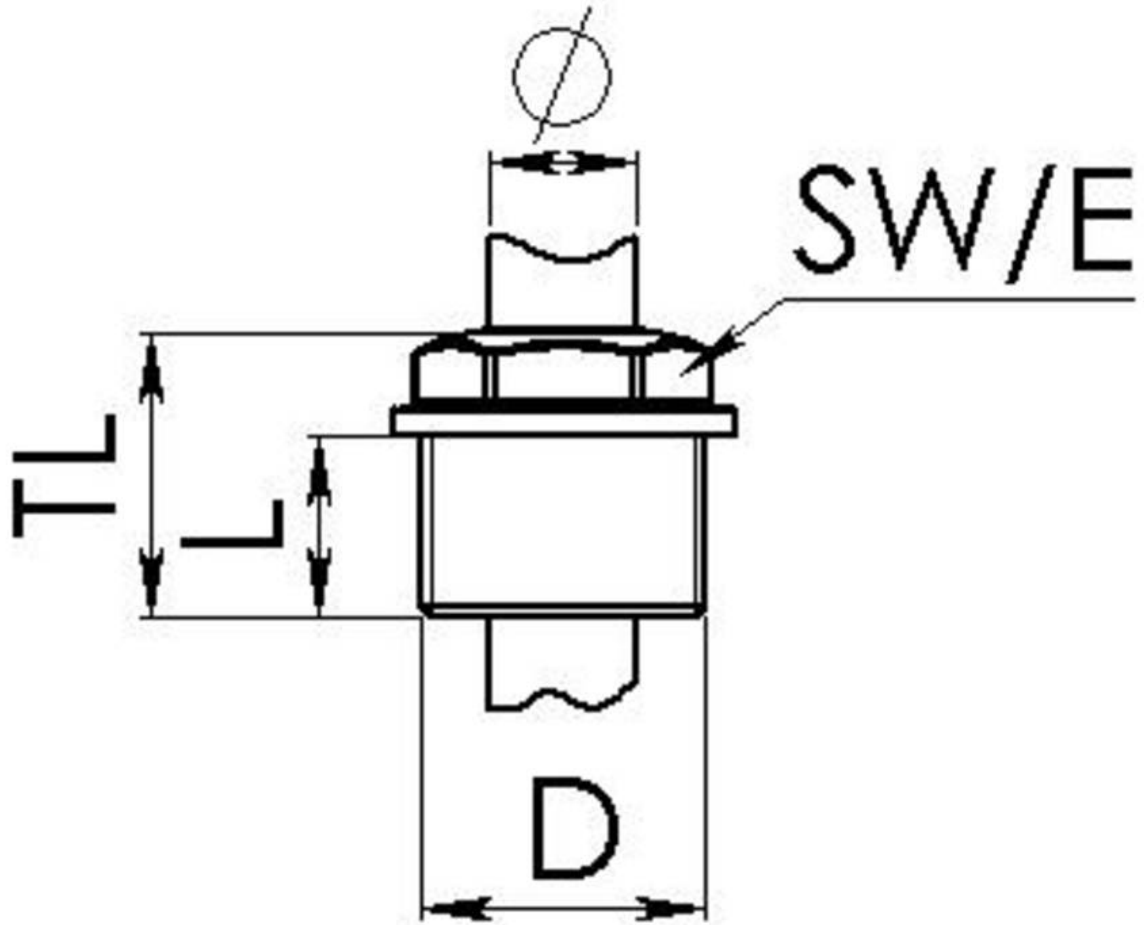

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com